


# Westfield Select Cables IP67 USB 2.0 Male Cable Assembly

## IP67 USB 2.0 Male Molded Cables

Customer to Specify Cable Length and Connector / Termination on Free end.

\* Screw Locking Type

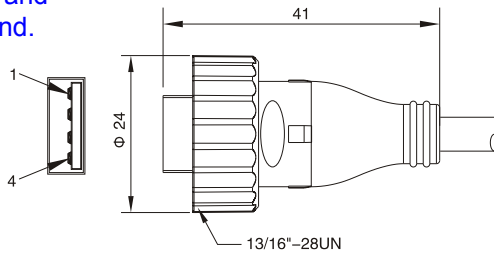

### General information

|                      |                        |
|----------------------|------------------------|
| Ambient temperature: | -20 °C ~ + 80 °C       |
| Connector insert:    | PBT                    |
| Connector contacts:  | Brass with gold plated |
| Connector overmold:  | TPU                    |
| Coupling nut/screw:  | PA + GF                |
| Seal-ring:           | FKM                    |

|                        |                           |
|------------------------|---------------------------|
| Insulation resistance: | ≥ 100MΩ                   |
| Contact resistance :   | ≤ 30mΩ                    |
| Shielding:             | Available                 |
| IP rating:             | IP 67 in locked condition |

Westfield Part Number: IP67USB2.0STRM-XXCB

### Electrical data & Mechanical data

X refers to cable specification

| Contacts            | Rated current | Voltage |     | Cable jacket | Wire insulation | Cable ending & length              |
|---------------------|---------------|---------|-----|--------------|-----------------|------------------------------------|
|                     |               | A/C     | D/C |              |                 |                                    |
| USB 2.0 A type male | 1.5A          | 30V     | 30V | PVC          | PVC             | Customized cable ending and length |