

# Westfield Select IP67 D-Sub Male Front Panel Mount Connectors

IP67 D-Sub Male Panel Mount - Solder Bucket Type (Pre-made Cable Assemblies also available)

Front Panel Mount Male D-Sub


Locking via 440unc screws

Machined / Turned Pin Contacts

Gold Flash Plating: Others Available

Straight Solder Bucket Type

We can attach custom cables if req'd

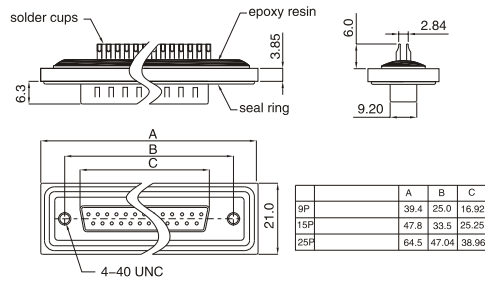

## General information

Ambient temperature:	-25 °C ~ + 70 °C
Connector insert:	PBT+GF
Connector contacts:	Brass gold plated
Coupling nut/screw:	Brass nickel plated
Seal / O-ring:	FKM

Insulation resistance:	≥ 1000MΩ
Forward resistance :	≤ 10mΩ
Shielding:	Unavailable
IP rating:	IP 67 in locked condition

Part Numbers:  
 09way = IP67DSUB09MSNS  
 15way = IP67DSUB15MSNS  
 25way = IP67DSUB25MSNS

## Electrical data & Mechanical data

Contacts	Contacts	Rated current	Voltage	
			A/C	D/C
D-Sub 9P	Solder version	5A	300V	300V
D-Sub 15P	Solder version	5A	300V	300V
D-Sub 25P	Solder version	5A	300V	300V

## Remarks

Machined Pin Gold Flash Plated : For Specific Gold Plating Options + Mating Cycle Requirements Please Contact Sales Office.

Competitors Product Cross Reference Service Available